




ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

[BUSINESS FIELDS]



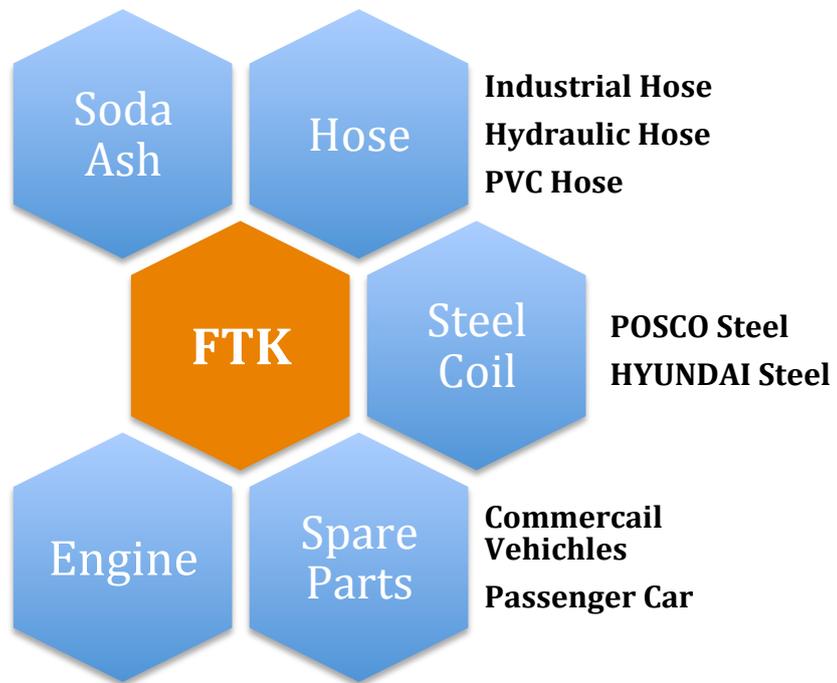

ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

[SPARE PARTS]



MOBIS



OEM BRANDS





ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
 PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

BRAND LOGO	BRAND NAME	MAIN PRODUCTS
	HVCC HALLA VISTEON	Radiator & Condenser & Rad Fan Motor Assy & A/C Fan Motor Assy & Fan Clutch & A/C Filter & Compressor Assy & Motor Fan Heater & Heater Core
	MANDO+	Shock Absorber & Starter Motor & Alternator & Steering Gear Parts & Brake Pad & Shoe & Brake Caliper & Break Master System & Water Pump & Air Filter & Cabin Filter & Brake Disc, Drum
	GATES	Timing Belt & V-Belt & Auto Tensioner Bearing & Idle Bearing
	VALEO	Clutch Cover & Clutch Disc & Clutch Release Bearing & Clutch Kit & Cilynder-Clutch Master & Release & Brake Disc & Drum-Brake & Water Pump & Starter Motor & Alternator & Shock Absorber & Spark Plug Cable & Tesioner & Idler Bearing & Wheel Bearing & Wiper Blad
	SECO	Clutch Cover & Clutch Disc & Clutch Release Bearing & Clutch Kit & Brake-Disc & Drum-Brake & CamShaft
	SANGSIN	Brake Pad & Brake Shoe
	GMB	Tensioner Bearing & Idler Bearing & Water Pump & Universal Joint Bearing & Fan Clutch
	ILJIN	Wheel Hub Bearing Hub Assy & Suspension Parts All (Tie Rod End & Ball Joint Assy)
	KBC	Ball Bearing
	DOOWON (BINGO)	Radiator & Condenser & Rad Fan Motor Assy & A/C Fan Motor Assy & Fan Clutch & A/C Filter & Compressor Assy & Motor Fan Heater & Heater Core***(Pump Assy-Fuel Injection & Nozzle & Holder Assy-Injection)
	SHIN HAN	Engine Valve (Exhaust/Intake)
	TCIC	Brake Cylinder & Brake Master System
	CTR	Suspension Parts All (Tie Rod End Out & Ball Joint Assy-Inr & Ball Joint Upr/Low & Link A-Stabilizer & Arm Assy-Control Upr/Low & Gear Assy-Bevel & Shaft Assy-Intermediate)
	DONGIL BELT	Timing Belt & V-Belt
	PYUNG HWA	Rubber Parts & Engine Mounting & Hose & Oil Seal
	DENSO PS	Electric Item & Sensor Parts Item & Ignition Coil & Alternator & Starter
	KFM	Engine Bearing Set (Connect Rod/Crankshaft)
	DONG YANG PISTON	Engine Piston
	NGK	Spark-Plug & Glow-Plug & O2 Sensor-Exhaust Oxygen & Exhaust Temperature Sensor & Air Heater
	YOUNGSHIN	Power Steering Oil Pump & Hydraulic Valve Aduster & Adjuster Assy-Rocker Arm Lash
	DELPHI	Air Compressor & Air Condenser & Fan-Eng Cool & Radiator & Electric Parts Items & Starter Motor & Alternator & Distributor & CV Joint Assy
	JICO & JUNGIL	Pump Assy-Coolant (Pump Assy Water) Case-Assy-Fr (Pump Assy Oil)



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

ENGINE PARTS

1. PISTON RING
2. PISTON SET
3. CYLINDER SLAVE & LINER
4. ENGINE VALVE
5. VALVE GUIDE
6. METAL BEARING(MAIN, CONROD)
7. GASKET(HEAD, OVERHAUL)

ELECTRICAL PARTS

1. ALTERNATOR
2. STARTER
3. VOLTAGE REGULATOR
4. HALOGEN LAMP AND BULB
5. SWITCH
6. LAMP(HEAD, SIDE, FOG)
7. GAUGE(SPEED, TEMP, OIL)

FILTER AND PUMP

1. OIL (LUBE, BY PASS)
2. AIR AND FUEL
3. INJECTION FILTER
4. TRANSMISSION
5. HYDRAULIC
6. WATER & SEPERATOR
7. FUEL PUMP

BRAKE & CLUTCH SYSTEM

1. BRAKE PAD
2. BRAKE SHOE
3. BRAKE LINING
4. BRAKE DRUM
5. CLUTCH DISK & COVER
6. RELEASE BEARING FOR CLUTCH
7. FRICTION MATERIALS

TUNE UP KITS

1. CONDENSER
2. IGNITION COIL
3. DISTRIBUTOR CAP
4. FRICTION MATERIALS

CABLES

1. BRAKE
2. CLUTCH
3. SPEED-METER
4. BATTERY
5. BOOSTER

COOLING SYSTEM

1. WATER PUMP
2. COOLING FAN
3. RADIATOR & CAP
4. THERMOSTAT

HYDRAULIC

1. CLUTCH MASTER CYLINDER
2. CLUTCH SLAVE CYLINDER
3. BRAKE MASTER CYLINDER
- 4.(1,2,3) REPAIR KITS

RUBBER PARTS

1. FAN BELT (COG, NON-COG TYPE)
2. RADIATOR HOSES
3. HYDRAULIC HOSES
4. OIL HOSES
5. AIR HOSES
6. ENGINE MOUNTING AND BUSHING
7. OIL SEAL
8. WEATHER STRIP
9. TIRE & TUBE

SUSPENSION PARTS

1. UNIVERSIAL JOINT
2. BALL JOINT
3. TIE ROD END
4. LEAF SPRING
5. COIL SPRING

BEARING

1. BALL AND IDLER PULLEY BEARING
2. BALL BEARING UNIT (INDUSTRIAL)
3. TENSIONER



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

[SODA ASH]

1. Soda Ash Dense 99.0%

COMMODITY I SODA ASH DENSE 99.0% (GRADE A)

ORIGIN RUSSIA

BRAND CRIM SODA

QUANTITY 50,000 MT/MONTH

PACKING 1,000 KG, BIG BAG/ 50 KG BAG

	Index Name	Grade A
1	Outward appearance	White color grains
2	Sodium carbonate (Na ₂ CO ₃) mass content, %, min	99.0
3	Sodium carbonate (Na ₂ CO ₃) mass content equivalent to unignited product, %, min	98.2
4	Mass content loss at ignition (270-300) 0 C, %, max	0.8
5	Chlorides mass content equivalent to NaCl, %, max	0.5
6	Ferrum mass content equivalent to Fe ₂ O ₃ , %, max	0.005
7	Mass content of water insoluble, %, max	0.04
8	Sulfates mass content equivalent to Na ₂ SO ₄ , %, max	0.05
9	Bulk density, g/cm ³ , min	0.9



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

2. Soda Ash Light 99.0%

COMMODITY II **SODA ASH LIGHT 99.0% (GRADE B)**

ORIGIN **RUSSIA**

BRAND **CRIM SODA**

QUANTITY **50,000 MT/ MONTH**

PACKING **1,000 KG, BIG BAG/ 50 KG BAG**

	Index Name	Grade B
1	Outward appearance	White color grains
2	Sodium carbonate (Na ₂ CO ₃) mass content, %, min	99.0
3	Sodium carbonate (Na ₂ CO ₃) mass content equivalent to unignited product, %, min	98.2
4	Mass content loss at ignition (270-300) 0 C, %, max	0.8
5	Chlorides mass content equivalent to NaCl, %, max	0.5
6	Ferrum mass content equivalent to Fe ₂ O ₃ , %, max	0.003
7	Mass content of water insoluble, %, max	0.04
8	Sulfates mass content equivalent to Na ₂ SO ₄ , %, max	0.05
9	Bulk density, g/cm ³ , min	Not rated



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

3. Sodium Hydroxide Liquid 49 – 51%

COMMODITY III : **SODIUM HYDROXIDE LIQUID 49 ~ 51 %**
ORIGIN : **UKRAINE**
QUANTITY : **2,000 MT/MONTH**
CAS-No. : **1310-73-2**
EC No. : **215-185-5**
DENSITY : **2.13 g/cm³**
MOLECULAR FORMULA : **H-Na-O**
MOLECULAR WEIGHT : **40 g/mol**



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

[HOSE]

1. Hose (PVC Hose, Rubber Hose, Flange, Coupling, Fittings)



Industrial Braided Hose	Industrial Suction & Discharge Hose	Agricultural Hose
Home & Plumbing Hose	Petroleum Hose	Water & Steam Hose
Air & Welding Hose	Chemical Hose	Food Hose
Hydraulic Hose	Fittings	



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 Email: foxtradekorea@gmail.com

[STEEL COIL]

2. Steel Coil (POSCO Steel, HYUNDAI Steel)



Hot Rolled Steel	Steel Plate	Wire Rod
Cold Rolled Steel	Galvanized Steel	Electrical Galvanized Steel
Electrical Steel	Automotive Materials	Stainless Steel



Hot Rolled Steel	Steel Plate	Cold Rolled Steel
Reinforcing Bar	Section	Special Steel
Stainless Steel	ERW Pipe	



ADDRESS: SUYEONG-GU, MILLAK-DONG 126-11 CENTUM VISTA DONGWON 2-CHA, 204-304
PHONE: (82) 10 7695 1278 **Email:** foxtradekorea@gmail.com



Best Partner For Your Business



CLEAR BRAIDED HOSE

B01

APPLICATION

- In plant equipment water supply & bilge drain lines
- Liquid and powder transport lines
- Food & beverage dispensing Industrial, food, beverage, agriculture & fishery industries

FEATURES

- Transparent & excellent flexibility
- Continuous permanent length marks for easy cutting

CERTIFIACTE

- FDA/ROHS/NSF

Normal Size		I.D		O.D		Std. Length		W.P (at 20°C)	
mm	Inch	mm	Inch	mm	Inch	m	ft	kg/ cm ³	psi
006	1/4	6.0	0.236	10.0	0.394	90	300	10	142
008	5/16	8.0	0.315	12.0	0.472	90	300	10	142
009	-	9.0	0.354	13.0	0.512	90	300	10	142
010	3/8	10.0	0.394	14.5	0.571	90	300	8	114
012	-	12.0	0.472	16.5	0.650	90	300	8	114
013	1/2	13.0	0.512	17.5	0.689	90	300	8	114
016	5/8	16.0	0.630	21.5	0.846	45	150	8	114
019	3/4	19.0	0.748	25.0	0.984	45	150	6	85
025	1	25.0	0.984	32.0	1.260	45	150	6	85
032	1 1/4	32.0	1.260	40.0	1.575	45	150	4	57
038	1 1/2	38.0	1.496	47.0	1.850	45	150	4	57
050	2	50.0	1.969	61.0	2.402	45	150	3	43



PVC HEAVY DUTY SUCTION HOSE F-02

APPLICATION

High pressure general material handling Conveying dry & wet granule materials Industrial, agriculture, mining, construction & fishery industries Features

FEATURES

- Economical & flexible
- Abrasion & chemical resistant
- Impact & crush resistant
- Excellent bending radius
- Constructed with rigid spiral helix reinforcement
- Smooth inner construction for unrestricted flow of materials

Normal Size		I.D		O.D		Std. Length		W.P (at20°C)	
mm	inch	mm	inch	mm	inch	m	ft	kg/cm ²	psi
025	1	25.4±0.5	1.0	30.4	1.196	50	150	5.0	70
032	1 1/4	31.7±0.5	1.248	37.1	1.460	50	150	5.0	70
038	1 1/2	38.1±0.5	1.5	44.1	1.736	50	150	4.5	65
050	2	50.8±1.0	2.0	58.3	2.295	50	150	4.5	65
065	2 1/2	63.5±1.0	2.5	72.1	2.838	50	150	4.0	55
075	3	76.2±1.0	3.0	85.0	3.346	50	150	4.0	55
100	4	101.6±1.5	4.0	112.6	4.433	30	90	4.0	55
125	5	127.0±1.5	5.0	138.4	5.448	30	90	3.0	55
150	6	152.4±1.5	6.0	166.2	6.543	20	60	3.0	55



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



TANK TRUCK HOSE

Application

The industry standard for tank truck, in-plant operations to transfer gasoline, oil and other petroleum base products up to 50% aromatic content.

Tube

Nitrile synthetic rubber RMA class A (High oil resistance)

Reinforcement

Spiral-plied synthetic fabric with helix wire

Cover

Black (or Red) abrasion, oil, weather & ozone resistant Neoprene rubber (Smooth cover)

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	1'~6'8' 60m/30m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1'	25.4	1.44	36.5	150	10	6	150
2	1 ¼'	31.8	1.69	42.9	150	10	8	200
3	1 ½'	38.2	1.94	49.2	150	10	10	250
4	2'	50.8	2.45	62.3	150	10	12	300
5	2 ½'	63.5	2.95	75.0	150	10	16	400
6	3'	76.2	3.48	88.3	150	10	20	500
7	4'	101.6	4.54	115.2	150	10	28	700
8	5'	127.0	5.63	143.1	150	10	40	1,000
9	6'	152.4	6.83	173.6	150	10	48	1,200
10	8'	203.2	8.94	227.1	150	10	64	1,600



Add : Haeudae - Gu, Centum 3 – Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
 Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



FLEX TANK TRUCK HOSE

Application

The industry standard for tank truck, in-plant operations to transfer gasoline, oil and other petroleum base products under pressure or full-suction where maximum flexibility is needed.

Tube

Nitrile synthetic rubber RMA class A (High oil resistance)

Reinforcement

Spiral-plied synthetic fabric with helix wire

Cover

Black (or Red) abrasion, oil, weather & ozone resistant Neoprene synthetic rubber (Flat-corrugated cover)

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1 ½'	38.1	1.96	49.7	150	10	6	150
2	2'	50.8	2.45	62.3	150	10	8	200
3	2 ½'	63.5	2.95	75.0	150	10	10	250
4	3'	76.2	3.48	88.3	150	10	12	300
5	4'	101.6	4.54	115.2	150	10	16	400
6	5'	127.0	5.63	143.1	150	10	25	650
7	6'	152.4	6.83	173.6	150	10	30	750



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



OIL DISCHARGE HOSE

Application

The softwall hose is for the discharge of gasoline, oil and other petroleum based products on tank and docks.

Tube

Nitrile synthetic rubber RMA class A (High oil resistance)

Reinforcement

Spiral-plyed synthetic fabric with static wire

Cover

Black (or Red) abrasion, oil, weather & ozone resistant Neoprene rubber

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	1'~6'/8' 60m/30m		

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	2'	50.8	2.90	73.6	300	20	12	300
2	3'	76.2	3.95	100.4	300	20	20	500
3	4'	101.6	4.97	126.2	300	20	28	700
4	5'	127.0	6.04	153.5	300	20	40	1,000



Add : Haeudae - Gu, Centum 3 – Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



DRY CEMENT SUCTION HOSE

Application

Used in the transfer of dry materials & slurries and ideal for dry cement, pebble, lime and other abrasive materials.

Tube

Black abrasion resistant synthetic rubber

Reinforcement

Spiral-plied synthetic fabric with helix wire

Cover

Black abrasion, weather & ozone resistant synthetic rubber

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	3:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	2'	50.8	2.90	73.6	300	20	12	300
2	3'	76.2	3.95	100.4	300	20	20	500
3	4'	101.6	4.97	126.2	300	20	28	700
4	5'	127.0	6.04	153.5	300	20	40	1,000



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com

V



OIL HOSE

Application

The industry standard for tank truck, in-plant operations to transfer gasoline, oil and other petroleum base products up to 50% aromatic content.

Tube

Nitrile synthetic rubber (RMA class A)

Reinforcement

Spiral-plied synthetic fabric

Cover

Black abrasion, oil, weather & ozone resistant Neoprene synthetic rubber

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	60 m		

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1 ¼'	31.8	1.64	41.7	150	10	13	330
2	1 ½'	38.2	1.89	48.0	150	10	15	380
3	1 ¾'	44.5	2.14	54.4	150	10	18	450
4	2'	50.8	2.39	60.7	150	10	20	500
5	2 ½'	63.5	2.89	73.4	100	7	25	650
6	3'	76.2	3.39	86.1	100	7	30	750
7	3 ½'	88.9	3.94	100.0	70	5	35	900
8	4'	101.6	4.47	113.5	70	5	40	1,000



Add : Haeudae - Gu, Centum 3 - Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
 Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



AIR & WATER HOSE

Application

This Air & Water Hose is for a wide range of industrial, construction applications.

Tube

Black NR/SBR

Reinforcement

Spiral-plied synthetic fabric

Cover

Black abrasion, weather & ozone resistant synthetic rubber

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	60 m		

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1 ¼'	31.8	1.68	42.6	150	10	13	330
2	1 ½'	38.1	1.93	48.9	150	10	15	380
3	1 ¾'	44.5	2.19	55.5	150	10	18	450
4	2'	50.8	2.45	62.2	150	10	20	500
5	2 ½'	63.5	2.99	75.9	100	7	25	650
6	3'	76.2	3.51	89.2	100	7	30	750
7	3 ½'	88.9	4.07	103.5	70	5	35	900
8	4'	101.6	4.59	116.6	70	5	40	1,000



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



SINGLE WELDING HOSE

Application	Oxygen, acetylene welding and cutting where separate lines are preferred.
Tube	Black NR/SBR synthetic rubber
Reinforcement	Spiral synthetic yarn
Cover	Yellow, Red, Green, Blue synthetic rubber

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	1/4'~1/2', 3/4' -100m	3/8'~1/2', 3/4' – 50m	

Certificate [ISO 9001, QS 9000, ISO 14001](#)

	I.D		O.D		MAX. W.P	
	in	mm	in	mm	psi	bar
1	1/4'	6.4	0.54	13.8	200	14
2	5/16'	7.9	0.62	15.7	150	10
3	3/8'	9.5	0.70	17.8	150	10
4	1/2'	12.7	0.88	22.3	150	10
5	5/8'	15.9	1.04	26.4	150	10
6	3/4'	19.1	1.18	30.0	100	7



Add : Haeudae - Gu, Centum 3 – Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
 Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



OIL FIELD SUCTION HOSE

Application

Ideal for handling crude, brine, drilling, mud, tank bottoms, mild solutions of hydrochloric acids. Not recommended for refined petroleum products when aromatic content exceed 35%.

Tube

Special black synthetic rubber

Reinforcement

Spiral-plied synthetic fabric with dual helix wire

Cover

Black weather & ozone resistant synthetic rubber (Smooth cover)

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	3:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1 ½'	38.1	1.96	49.7	150	10	10	250
2	2'	50.8	2.47	62.8	150	10	12	300
3	2 ½'	63.5	2.97	75.5	150	10	16	400
4	3'	76.2	3.48	89.6	150	10	20	500
5	4'	101.6	4.55	115.6	150	10	28	700



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



FLEX OIL FIELD SUCTION HOSE

Application

Ideal for handling crude, brine, drilling, mud, tank bottoms, mild solutions of hydrochloric acids. Not recommended for refined petroleum products when aromatic content exceed 35%.

Tube

Special black synthetic rubber

Reinforcement

Spiral-plyed synthetic fabric with dual helix wire

Cover

Black abrasion, weather & ozone resistant synthetic rubber (Flat-corrugated cover)

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	3:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1 ½'	38.1	1.97	50.1	150	10	6	150
2	2'	50.8	2.49	63.2	150	10	8	200
3	2 ½'	63.5	3.01	76.5	150	10	10	250
4	3'	76.2	3.54	89.8	150	10	12	300
5	4'	101.6	4.65	118.0	150	10	16	400
6	5'	127.0	5.65	143.6	150	10	25	650
7	6'	152.4	6.67	169.4	150	10	30	750



Add : Haeudae - Gu, Centum 3 – Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
 Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



WATER SUCTION HOSE

Application

This hose is constructed with the highest quality compounds to provide maximum flexibility and lighter weight for easy handling.

Tube

Black EPDM/SBR synthetic rubber

Reinforcement

Spiral-plied synthetic fabric with helix wire

Cover

Black abrasion, weather & ozone resistant synthetic rubber (Smooth cover)

Temperature	-30 ⁰ C to 80 ⁰ C	Safety Factor	3:1
Max. Length	1'~6', 8', 10'~12' -60m 1'~6' – 30m, 8' – 20m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	1'	25.4	1.46	37.2	150	10	6	150
2	1 ¼'	31.8	1.72	43.6	150	10	8	200
3	1 ½'	38.1	1.96	49.9	150	10	10	250
4	2'	50.8	2.46	62.6	150	10	12	300
5	2 ½'	63.5	2.96	75.3	150	10	16	400
6	3'	76.2	3.50	89.0	150	10	20	500
7	4'	101.6	4.55	115.6	150	10	28	700
8	5'	127.0	5.67	144.1	150	10	40	1,000
9	6'	152.4	6.67	169.5	150	10	48	1,200
10	8'	203.2	8.89	225.7	150	10	64	1,600
11	10'	254.0	11.11	282.2	150	10	80	2,000
12	12'	304.8	13.19	335.0	150	10	110	2,750



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



LOW TEMP TANK TRUCK HOSE

Application

The hose is for use in low-temperature operations for transferring gasoline, oil and other petroleum base products.

Tube

Low temperature oil resistant ECO rubber RMA class A (High oil resistance)

Reinforcement

Spiral-plyed fabric with dual helix wire

Cover

Blue low temperature oil resistant Neoprene rubber (Flat-corrugated cover)

Temperature	-54 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	2'	50.8	2.50	63.4	150	10	8	200
2	2 ½'	63.5	3.00	76.1	150	10	10	250
3	3'	76.2	3.56	90.4	150	10	12	300
4	4'	101.6	4.68	118.8	150	10	16	400



Add : Haeudae - Gu, Centum 3 – Ro 26, U - Dong, Office 1804, Busan, South Korea, 612-889
Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com Skype : reshetnev



LOW TEMP OIL DISCHARGE HOSE

Application

The softwall hose is for the discharge of gasoline, oil and other petroleum based products in low-temperature operations.

Tube

Low temperature oil resistant ECO rubber RMA class A (High oil resistance)

Reinforcement

Spiral-plyed synthetic fabric with static wire

Cover

Blue low temperature oil resistant Neoprene rubber

Temperature	-54 ⁰ C to 80 ⁰ C	Safety Factor	4:1
Max. Length	60m	Vacuum	737mmHg / 29inHg

Certificate

ISO 9001, QS 9000, ISO 14001

	I.D		O.D		MAX. W.P		Bend Radius	
	in	mm	in	mm	psi	bar	in	mm
1	2'	50.8	2.50	63.4	150	10	8	200
2	2 ½'	63.5	3.00	76.1	150	10	10	250
3	3'	76.2	3.56	90.4	150	10	12	300
4	4'	101.6	4.68	118.8	150	10	16	400



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



SPRING HOSE

B12

APPLICATION

High pressure feeder Industrial vacuum pumps Machine tools
lubrication lines Water & liquid transfer Manufacturing industrial &
machine shop industries

FEATURES

- Steel wire helix reinforcement for excellent vacuum and static dissipation
- Transparency for visual observation
- Cold weather resistant
- Chemical resistant
- Excellent flexibility

CERTIFIACTE

- NSF

Normal Size		I.D		O.D		Std. Length		W.P (at 20°C)	
mm	Inch	mm	Inch	mm	Inch	m	ft	kg/ cm ³	psi
008	5/16	8.0	0.314	14.0	0.571	50	150,300	10	140
012	1/2	12.0	0.472	18.0	0.708	50	150,300	8	115
015	5/8	15.0	0.591	22.0	0.866	30	90,150	7	100
019	3/4	19.0	0.748	26.0	1.023	30	90,150	6	85
025	1	25.0	0.984	33.0	1.299	30	90,150	5	70



Add Suyeong-Gu, Millak-Dong 126-11 Centum Vista Dongwon 2-cha, 204 -304, Busan, South Kore, 48272

Phone : (82) 10 7695 1278 E-mail : foxtradekorea@gmail.com



SPRING HOSE

S 05

APPLICATION

High pressure feeder Industrial vacuum pumps Machine tools
lubrication lines Water & liquid transfer Manufacturing industrial &
machine shop industries

FEATURES

- Steel wire helix reinforcement for excellent vacuum and static dissipation
- Transparency for visual observation
- Cold weather resistant
- Chemical resistant
- Excellent flexibility

CERTIFIACTE

- NSF

	Description	m
1	8*13.5	50
2	12*18	50
3	15*22	50
4	19*26	50
5	25*33	50
6	32*41	40
7	38*48	40
8	50*62	40



STANDARD DUTY LAYFLAT HOSE D-01

APPLICATION

Economical general purpose Low pressure sprinkling Construction dewatering
 Submersible pumping Industrial wash down Construction, industrial & pump industries

FEATURES

- Economical
- Excellent performance on flat ground
- 2~7kgf/cm² working pressure
- Lightweight and compact for economical storage
- 100 meter continuous, coiled

Normal Size		I.D		Wall Thickness		Std. Length		W.P (at20°C)	
mm	inch	mm	inch	mm	inch	m	ft	kg/cm ²	psi
025	1	26.5	1.043	1.4	0.055	100	300	7	100
032	1 1/4	33.5	1.319	1.4	0.055	100	300	6	85
040	1 1/2	40.0	1.575	1.4	0.055	100	300	5	70
050	2	52.0	2.047	1.4	0.055	100	300	4.5	65
065	2 1/2	65.0	2.559	1.5	0.059	100	300	4	55
075	3	77.0	3.031	1.5	0.059	100	300	4	55
100	4	103.0	4.055	1.5	0.059	100	300	4	55
125	5	128.0	5.039	1.8	0.071	100	300	3	45
150	6	153.0	6.024	1.8	0.071	100	300	3	45
200	8	205.0	8.150	2.1	0.083	100	300	3	45
250	10	252.2	10.197	2.3	0.091	50	100	2	30
300	12	302.0	12.126	2.5	0.098	50	100	2	30



PVC STANDARD DUTY SUCTION HOSE F01

APPLICATION

General material handling Power, liquid & water transfer lines
 Industrial, construction, agriculture & shipbuilding industries

FEATURES

- Abrasion resistant
- Excellent bending radius
- Corrugated rigid spiral helix reinforcement
- Smooth inner construction for unrestricted flow of materials
- Flexible & lightweight for easy transport

Normal Size		I.D		O.D		Std.Length		W.P (at20°C)	
mm	inch	mm	inch	mm	inch	m	ft	kg/cm ²	psi
016	5/8	15.9±0.5	0.625	21.1±1.0	0.803	20	60	4.2	60
019	3/4	19.0±0.5	0.748	24.8±1.0	0.976	30	90	4.0	55
025	1	25.0±0.5	1.000	30.4±1.0	1.196	50	150	4.0	55
032	1 1/4	31.7±0.5	1.248	37.6±1.0	1.480	50	150	4.0	55
038	1 1/2	38.0±0.5	1.5	44.8±1.0	1.799	50	150	3.5	50
050	2	50.8±1.0	2.0	59.1±1.5	2.326	50	150	3.5	50
065	2 1/2	63.5±1.0	2.5	70.8±1.5	2.877	50	150	3.0	45
075	3	76.2±1.0	3.0	87.5±1.5	2.877	50	150	3.0	45
100	4	101.6±1.5	4.0	116.6±2.0	4.590	30	90	3.0	45
150	6	152.4±1.5	6.0	167.2±2.0	6.614	20	60	2.5	35
200	8	203.2±1.5	8.0	223.8±2.0	8.811	10	30	2.0	35
250	10	254.0±2.0	10.0	276.7±2.5	10.893	10	30	1.5	20
300	12	304.8±2.0	12.0	330.1±2.5	12.996	10	30	1.0	15